




B-01a

BOPP PLAIN HIGH SLIP FILM

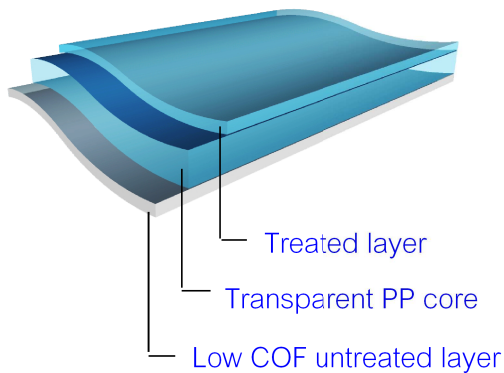

Description:

This film is specially developed to serve high speed machine for wrap around label application. It delivers excellence printing quality due to good flatness, high strength, and high dimensional stability.

Characteristics :

- Clarity
- Good flatness & high strength
- Excellence dimensional stability
- Suitable for high speed printing machine.
- Less electrostatic on film surface

TECHNICAL DATA

TYPICAL PROPERTIES	UNIT	TEST METHODS	TYPICAL VALUE		
THICKNESS	Micron	Progage	25	30	40
YIELD	m ² /kg	-	43.96	36.63	27.47
DENSITY	g/cm ³	ASTM D-1505	0.91		
AVERAGE THICKNESS VARIATION	%	ASTM E-252	± 3		
TENSILE STRENGTH	kg/mm ² (min)	MD	13		
		TD	24		
ELONGATION AT BREAK	% (max)	MD	200		
		TD	70		
THERMAL SHRINKAGE (120°C 15min.)	% (max)	MD	4.0		
		TD	2.0		
KINETIC C.O.F.	NT/NT (max)	ASTM D-1894	0.35		
WETTING TENSION	Dyne/cm (min)	ASTM D-2578	38		
GLOSS (Angle 45°)	% (min)	ASTM D-2457	85		
HAZE	% (max)	ASTM D-1003	1.5		

DESCRIPTION OF SUPPLY

PAPER CORE I.D.	77 mm (3 in.) 153 mm (6 in.)
ROLL O.D.	max. 800 mm
WIDTH RANGE	100 mm - 1,500 mm. (other width on request), Allowance 0, +3 mm
COMBINATION WIDTH	6,000 mm.
LENGTH RANGE	STANDARD 4,000 m., 6,000 m. (other length on request)
JOINT	maximum 10% per order

Food approval : Complied with US FDA & EU regulations (on request).

Storage condition: Should be kept in dry storage with temperature 30°C - 40°C.

Disclaimer:

The information provided above is accurate to the best of our knowledge. It is however suggested that the customer confirms these values and product compatibility prior to their use. Thai Film Industries PCL offers no guarantees nor accepts any responsibility for the fitness of the product for any particular use.